

NEW ZEALAND STANDARD

METHODS OF TESTING SOILS FOR CIVIL ENGINEERING PURPOSES

Part 2 Soil classification tests

TEST 2.4 DETERMINATION OF THE PLASTICITY INDEX

2.4.1

Scope

This method covers the determination of the plasticity index of a soil.

2.4.2

Related documents

The provisions of Part 1 of this Standard are applicable to, and shall be read in conjunction with, this method of test. Reference is also made to Tests 2.2, 2.3 and 2.5 of this Standard.

2.4.3

Procedure

Determine the liquid limit (*LL*) and the plastic limit (*PL*) by the procedures given in Tests 2.2 and 2.3 respectively. The cone penetration limit (*CPL*) as determined in Test 2.5 may be used in place of the liquid limit provided that its value is less than 50.

2.4.4

Calculations

(See Form 2.2, 2.3, 2.4 and Form 2.5). Calculate the plasticity index (*PI*). (See Note (1)).

2.4.5

Reporting of results

2.4.5.1

Report the following value:

The plasticity index (*PI*) as the numerical difference

between the liquid limit and the plastic limit. (See Note (1)).

2.4.5.2

When the plastic limit cannot be determined or when the plastic limit is equal to or greater than the liquid limit, report the material as non-plastic (*NP*). When the liquid limit cannot be obtained, report not applicable (*NA*).

2.4.5.3

State whether the material used in the test was whole soil, or fraction passing a 425 μm test sieve.

2.4.5.4

State the history of the sample, for example natural state, air-dried, oven-dried or unknown.

2.4.5.5

State that the result was obtained in accordance with this Standard Test Method.

NOTES ON TEST 2.4

- (1) Where the liquid limit or plastic limit, or both have been determined using a 0.01 g balance, the plasticity index shall be reported as a range of values determined as follows:

$$\begin{aligned} \text{Max. PI} &= \text{Max. LL} - \text{Min. PL} \\ \text{Min. PI} &= \text{Min. LL} - \text{Max. PL} \end{aligned}$$

Single User PDF Terms & Conditions

You have material which is subject to strict conditions of use. Copyright in this material is owned by the New Zealand Standards Executive. Please read these terms and conditions carefully, as in addition to the usual range of civil remedies available to Standards New Zealand on behalf of the New Zealand Standards Executive for infringement of copyright, under New Zealand law every person who infringes copyright may be liable to a fine of up to \$10,000 for every infringing copy or imprisonment of up to 5 years, or a fine of up to \$150,000 or imprisonment not exceeding 5 years.

You have access to a single-user licence to read this non-revisable Adobe Acrobat PDF file and print out and retain ONE printed copy only.

We retain title and ownership of the copyright in this PDF file and the corresponding permitted printed copy at all times.

Under this license use of both the PDF file and the single permitted printed copy of this PDF file you may make are restricted to you. Under no circumstances are you permitted to save, sell, transfer, or copy this PDF file, the one permitted printed copy of this PDF file, or any part of either of them.

You undertake that you will not modify, adapt, translate, reverse engineer, decompile, disassemble or create derivative works based on any of the downloaded PDF file, nor will you merge it with any other software or document, even for internal use within your organization.

Under no circumstances may this PDF file be placed on a network of any sort without our express permission.

You are solely responsible for the selection of this PDF file and any advice or recommendation given by us about any aspect of this PDF file is intended for guidance only and is followed or acted upon entirely at your own risk.

We are not aware of any inherent risk of viruses in this PDF file at the time that it is accessed. We have exercised due diligence to ensure, so far as practicable, that this file does not contain such viruses.

No warranty of any form is given by us or by any party associated with us with regard to this PDF file, and you accept and acknowledge that we will not be liable in any way to you or any to other person in respect of any loss or damage however caused which may be suffered or incurred or which may arise directly or indirectly through any use of this PDF file.

Regardless of where you were when you received this PDF file you accept and acknowledge that to the fullest extent possible you submit to New Zealand law with regard to this licence and to your use of this PDF file.

Copyright Standards New
Zealand

Form 2.2, 2.3, 2.4

DETERMINATION OF THE LIQUID AND PLASTIC LIMITS, PLASTICITY INDEX AND WATER CONTENT
(Tests 2.2, 2.3 and 2.4)

Job:

Sample no.:

Location:

Tested by:

Depth(s):

Date:

Test details: *

Test performed on fraction passing
425 μm sieve/whole soil

Checked by:

History: Natural/air-dried/oven-dried/
unknown

Date:

Soil equilibrated with water for h

Liquid limit machine no.

Test no.	1	2	3	4	5	6
Type of test †						
No. of blows (liquid limit test)						
Container no.						
Mass of container and wet soil M_2 g						
Mass of container and dried soil M_3 g						
Mass of container M_1 g						
Mass of water $M_2 - M_3$ g						
Mass of dried soil $M_3 - M_1$ g						
Water content $w = \frac{M_2 - M_3}{M_3 - M_1} \times 100$ %						

Water content %


Liquid limit

Plastic limit

Plasticity index

* Delete inappropriate words.

† Water content test to be marked w; Liquid Limit, LL; and Plastic Limit, PL.

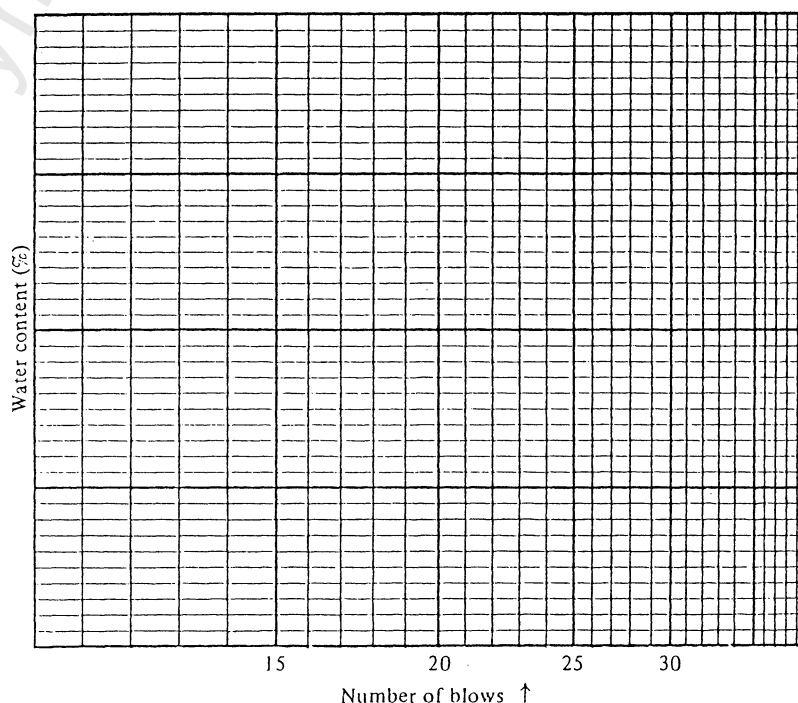

DETERMINATION OF THE PLASTICITY INDEX

Form 2.5
DETERMINATION OF THE CONE PENETRATION LIMIT AND WATER CONTENT
(Test 2.5)

Job:

Location:

Depth(s):

Test details: *

Sample no.:

Tested by:

Date:

Checked by:

Date:


Test performed on fraction passing 425 µm sieve/whole soil

History: Natural/air-dried/oven-dried/unknown

Soil equilibrated with water for h

Test no.		1	2	3	4
Initial dial gauge reading	R_1 mm				
Final dial gauge reading	R_2 mm				
Cone penetration	$P = R_2 - R_1$ mm				
Average cone penetration	mm				
Container number					
Mass of container and wet soil	M_2 g				
Mass of container and dried soil	M_3 g				
Mass of container	M_1 g				
Mass of water	$M_2 - M_3$ g				
Mass of dried soil	$M_3 - M_1$ g				
Water content $w = \frac{M_2 - M_3}{M_3 - M_1} \times 100$ %					

* Delete inappropriate words.

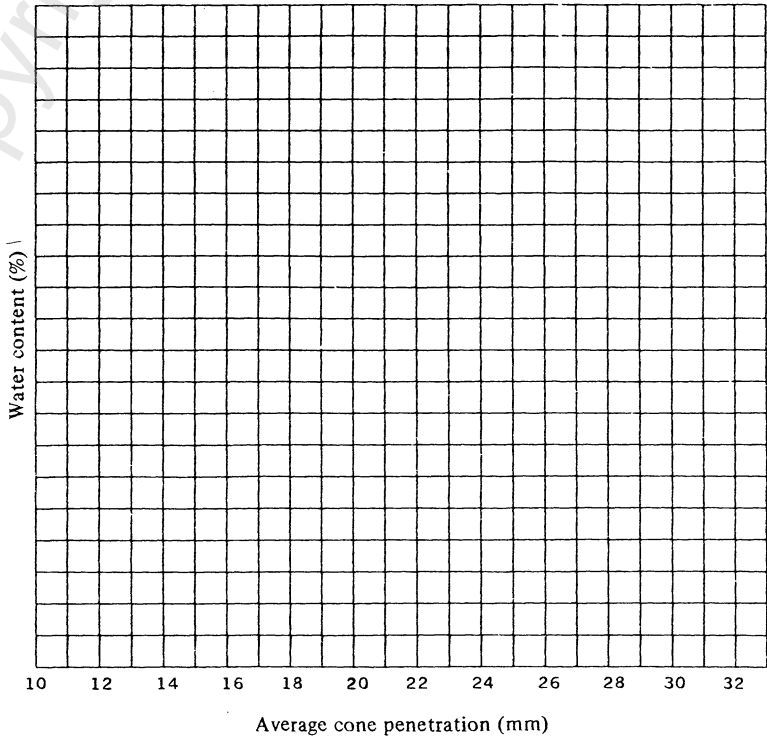

NOTES